

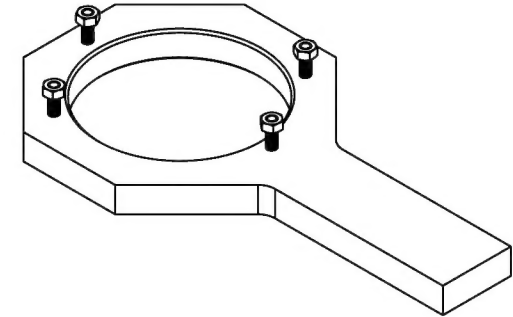


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		RELEASED FOR PRODUCTION	4/7/2016	SM	JAG

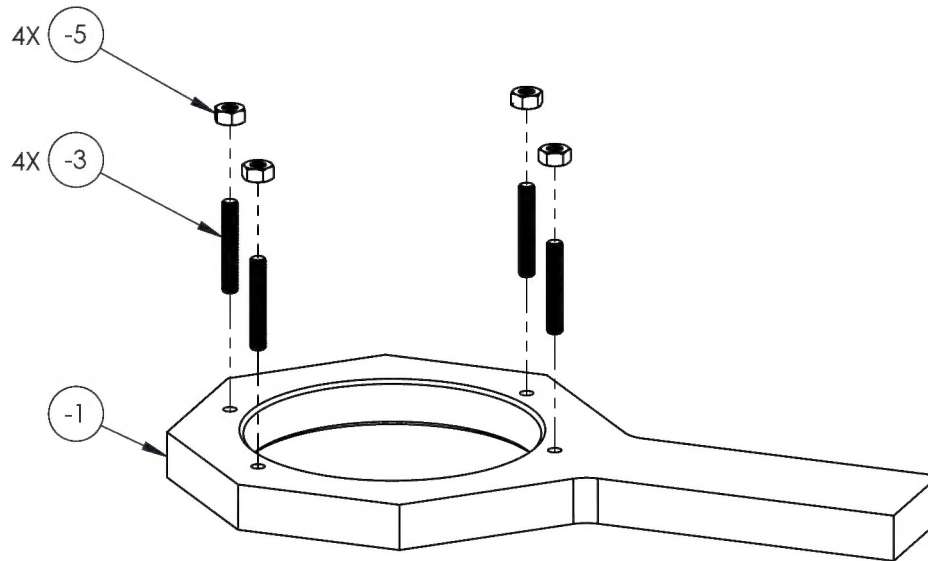




- NOTES:  
 1. REF. BELL T/N: T101948.  
 2. INSTALL -3 INTO -1 USING THREAD LOCKER.

<b>DART</b> AEROSPACE	
TITLE FIXTURE ASSEMBLY	
DWG NO. RB T101948	REV 1
MAT'L 6061	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TREAT NONE	.XXX ± .005 FRACTIONS ± 1/8
FINISH NONE	.XX ± .01 ANGLES ± 5°
SPEC NONE	.X ± .1 SURFACES = 125°
DRAWN BY: MACKOVJAK	1. BREAK ALL SHARP EDGES .015 x 45° OR .015R
CHECKED: DUERFELDT	2. DIMENSIONAL LIMITS APPLY AFTER PLATING
OPPS APPR: ANDERSON	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009
QA APPR: LINDSAY	USED ON MODEL
APPROVED: GILBERT	BELL
SCALE 1:3	DATE 3/29/2016
SHEET 1 OF 2	

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS	PG.
			-1	1	HANDLE	6061		2
		B/O	-3	4	THREADED STUD	STEEL	1/4-28 X 1-1/2 (MCMASTER-CARR # 90322A661)	1
		B/O	-5	4	NUT	STEEL	MS 51968-3 (MCMASTER-CARR # 94191A150)	1

This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS				
REV	ECR	DESCRIPTION	DATE	INITIAL
				APPROVED

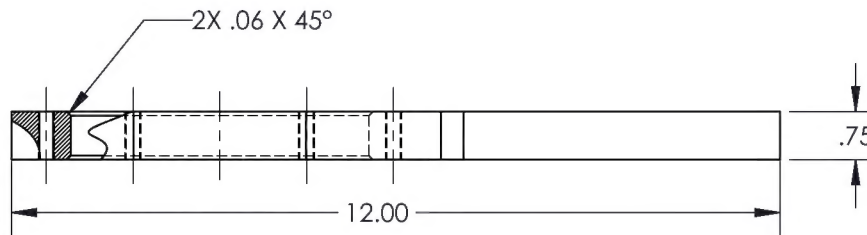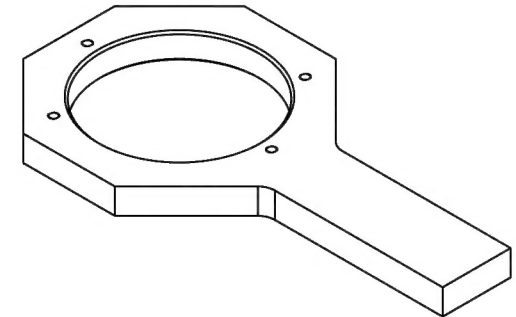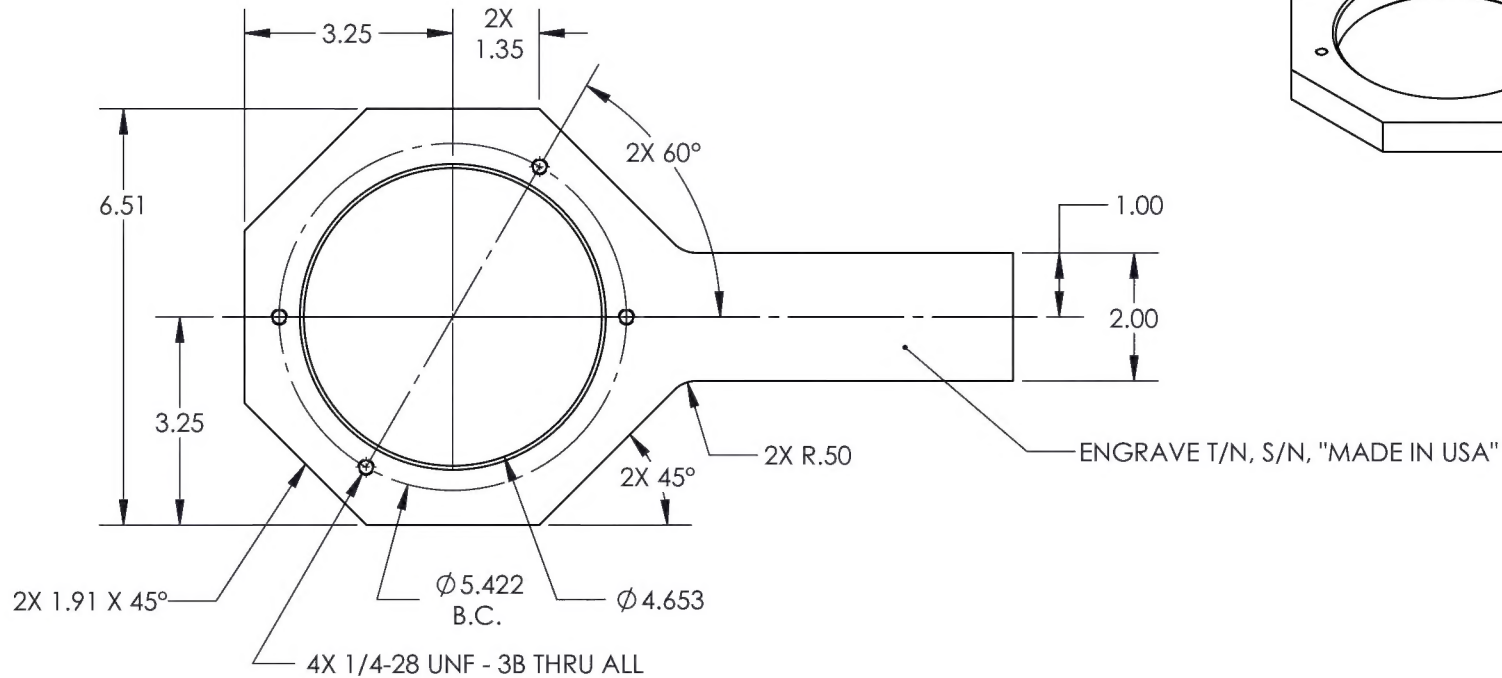

(-1)

HANDLE

<b>DART</b> AEROSPACE	
TITLE <b>FIXTURE ASSEMBLY</b>	
DWG NO. <b>RBT 101948-1</b>	REV <b>1</b>
MAT'L 6061 HEAT TREAT FINISH CLEAR ANODIZE SPEC MIL-A-8625F, TYPE II, CLASS I DRAWN BY: MACKOVJAK CHECKED: DUERFELDT OPPTS APPR: ANDERSON QA APPR: LINDSAY APPROVED: GILBERT	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES .XXX ± .005 FRACTIONS ± 1/8 .XX ± .01 ANGLES ± 5° .X ± .1 SURFACES = 125° 1. BREAK ALL SHARP EDGES .015 x 45° OR .015R 2. DIMENSIONAL LIMITS APPLY AFTER PLATING 3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	
USED ON MODEL <b>BELL</b>	
SCALE 1:3	DATE 3/29/2016
SHEET 2 OF 2	